

# Mounting Kit FX GEN 2 Back Brackets



## For individual mounting

Enabling different mounting options:  
hanging and standing




## Easy Installation

Specially designed for easy,  
uncomplicated, and flexible assembly



## Robust and vibration resistant

Ensuring long life

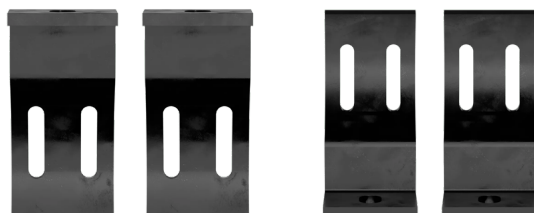

With the OSRAM LEDriving driving light Functional series FX Gen 2 portfolio, you experience impressive design, high performance and a wide range of possible applications. To attach the driving lights to the vehicle, OSRAM has developed a specially designed mounting kit for individual mounting. The LEDriving Mounting Kit FX GEN 2 Back Brackets for a particular flexible assembly is compatible with all OSRAM LEDriving driving lights of the Functional series FX Gen 2. It can be mounted to the vehicle with only a few screws, it is quick and easy to mount, and this also allows a faster and easier installation of the driving lights. With its robust and vibration resistant components, it is designed for everyday use. Perfectly matched to individual requirements and needs for versatile applications, it enables different mounting options: hanging and side. OSRAM provides a 2-year guarantee on the product<sup>1</sup>).

Technical data


Product information

|                                             |                               |
|---------------------------------------------|-------------------------------|
| Order reference                             | LEDDL FX ACC101               |
| Application (Category and Product specific) | Accessory Kit - Back Brackets |

Photometrical data

|                   |        |
|-------------------|--------|
| Color temperature | 6000 K |
|-------------------|--------|

Dimensions & weight

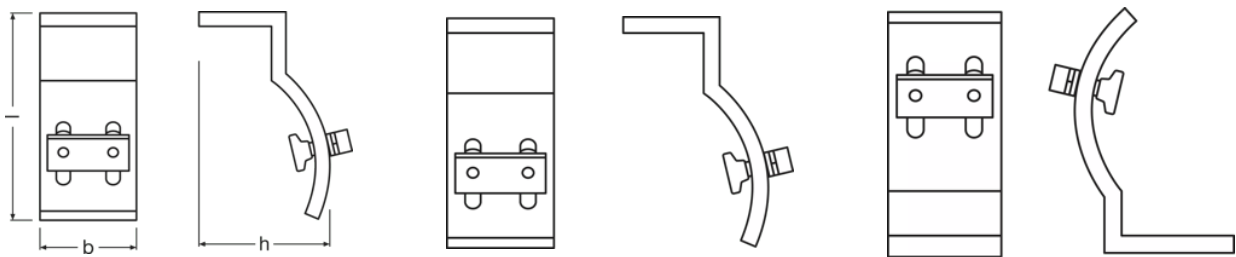

|                |          |
|----------------|----------|
| Product weight | 512.00 g |
| Length         | 72.0 mm  |
| Width          | 35 mm    |
| Height         | 48.0 mm  |

Lifespan

|             |          |
|-------------|----------|
| Lifespan Tc | > 5000 h |
| Guarantee   | 2 years  |

Additional product data

|                   |   |
|-------------------|---|
| Connector to lamp | - |
|-------------------|---|

Capabilities

|            |                   |
|------------|-------------------|
| Technology | LED <sup>1)</sup> |
|------------|-------------------|

<sup>1)</sup> Light-emitting diode application

Certificates & standards

|                           |   |
|---------------------------|---|
| Approval marks – approval | - |
|---------------------------|---|

Product datasheet

Country specific categorizations

|                 |                 |
|-----------------|-----------------|
| Order reference | LEDDL FX ACC101 |
|-----------------|-----------------|

Logistical data

|                |             |
|----------------|-------------|
| Commodity code | 76169990990 |
|----------------|-------------|

Environmental information

| Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH) |               |
|-----------------------------------------------------------------------|---------------|
| Date of Declaration                                                   | 24-10-2023    |
| Primary Article Identifier                                            | 4062172372275 |
| Declaration No. in SCIP database                                      | In work       |

Logistical Data

| Product code  | Product description                                       | Packaging unit<br>(Pieces/Unit) | Dimensions (length<br>x width x height) | Volume               | Gross weight |
|---------------|-----------------------------------------------------------|---------------------------------|-----------------------------------------|----------------------|--------------|
| 4062172372275 | Mounting Kit FX GEN<br>2 Back Brackets<br>LEDDL FX ACC101 | Folding carton box<br>1         | 127 mm x 57 mm x<br>82 mm               | 0.59 dm <sup>3</sup> | 543.00 g     |
| 4062172372282 | Mounting Kit FX GEN<br>2 Back Brackets<br>LEDDL FX ACC101 | Shipping carton box<br>10       | 307 mm x 274 mm x<br>112 mm             | 9.42 dm <sup>3</sup> | 5762.00 g    |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Safety advice

For detailed application information, please refer to the product data sheet and the user instruction

Legal advice

1)For precise conditions refer to: [www.osram.com/am-guarantee](http://www.osram.com/am-guarantee)

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

